


AE-Sensor Data Sheet

VS150-RI

The VS150-RI is a piezoelectric AE-sensor with integrated preamplifier. Its frequency response is characterized by a peak at 150 kHz where it exhibits a resonance. It is suitable for almost all AE application and especially suited for integrity inspection of metallic pressure vessels. The integrated preamplifier has 40 dB.

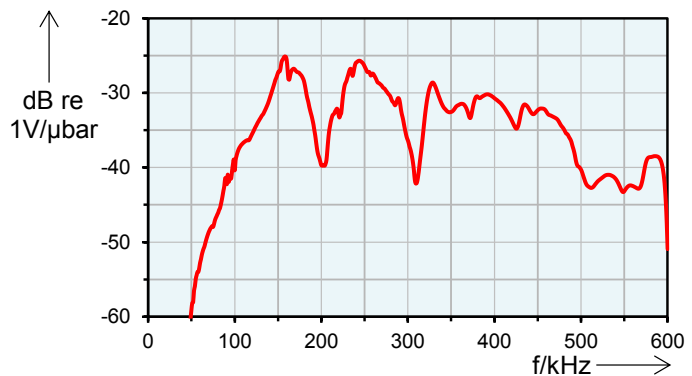

Technical Specification

| | | | |
|---|-------------------------------|---|--------------------------------|
| Frequency Range (f_{Peak}) [kHz] | 100 to 450 (150) | Size (D x H) [mm] | 28,6 x 31,5 |
| Power Supply [V_{DC}] | 28 ± 2 | Weight [g] | 80 |
| Typ. Power [W] | 0.56 / 2.5 @ Signal 0% / 100% | Case Material | Stainl. Steel (1.4571/ 1.4404) |
| Integrated Preamplifier | Yes | Wear Plate | Ceramics |
| Preamplifier Gain [dB] | 40 | Connector | BNC |
| Pulse Through | No | Shield Cross-Talk [dB] | < -80 |
| Operating Temperature [°C] | -40 to +85 | Typ. Noise (max. 1/s) [dB_{AE Peak}] | 22.2 @ 95 - 300 kHz |
| Vibration – Sinus Sweep | 2 Oct/Min, 5 to 50 Hz, 20 g | Typ. Noise [μV_{RMS}] | 3.0 @ 95 - 300 kHz |
| Ingress Protection Rating | IP40 | | |

Standards and Directives

| | |
|-----------------------------------|------------------------|
| EMC Directive | 2014/30/EU |
| EMC Standards | EN61326-1, EN61326-2-3 |
| Shock and Vibration Stand. | EN60068-2-6 |
| AE Standard | EN13477-1, EN13477-2 |

Certifications



Accessories

| | | | |
|------------------------|-------|---------------------|-------------|
| Mounting Holder | MAG4R | Sensor Cable | CBL-1-xM-V1 |
|------------------------|-------|---------------------|-------------|

Important instructions for your safety


The sensor was produced according to the state of technology and tested against highest quality standards and technical safety requirements. A risk of malfunction remains which can lead to

danger to life of operator, uninvolved third parties as well as damage of object under test or objects in its vicinity. Read the safety instructions carefully before using the AE-sensor.

Supplemental safety directives

1. Read the Acoustic Emission Sensors document (<https://www.vallen.de/quote-ref>)
2. Make sure that you comply to regulations at the AE-sensor installation site
3. Store these instructions

| | |
|--|---|
| ⚠ CAUTION | <i>CAUTION indicates a hazardous situation which, if not avoided, may result in minor or moderate injury.</i> |
| <h3 style="margin-top: 0;">Damaging of AE-sensor</h3> <p>An AE-sensor can get damaged when it is not operated within specified limits or handled carelessly. The function of the AE-sensor may be compromised or it may even be inoperable although its appearance e.g. housing, connector or wear plate do not indicate any damage.</p> <p>Risk: A damaged- or defective AE-sensor may not be able to detect potentially dangerous situations if it is used in a safety relevant inspection of e.g. pressure vessels or engineering structures such as bridges or dams.</p> <p>How to avoid the risk of damaging an AE-sensor:</p> <ul style="list-style-type: none"> • Do not store, transport or operate the sensor outside its specified environmental conditions • Do not drop the AE-sensor and handle it with care • Transport AE-sensors only in the boxes provided by Vallen Systeme <p>How to avoid using a non-functional AE-sensor:</p> <ul style="list-style-type: none"> • Do not use an AE-sensor that is visibly damaged. • Check the function and response of an AE-sensor prior to an inspection or AE-test by the use of controlled artificial sources • Check the function and response of an AE-sensor in regular intervals or when suspected to be damaged or to have undergone severe environmental conditions | |

| | |
|---|---|
|  | <h3 style="margin-top: 0;">Redemption and Disposal Information of used Vallen Equipment.</h3> <ul style="list-style-type: none"> • Equipment labelled with the symbol shown on the left must be disposed separately from unsorted municipal waste within the European Union. • Owners of old instruments request our agreement to return old electronic equipment. The goods to be returned must be described unambiguously and identified by serial and/or identification number. You can fill in our contact form (www.vallen.de/contact) or send us an email to sales@vallen.de. • Upon our approval owners may ship the goods free of costs to us. • We will dispose the goods according to the relevant laws and regulations on our costs. • Goods returned without our approval will not be accepted and returned to the owner on his account. • We explicitly point out that according to § 19a ElektroG3 you are responsible to delete any personal data on the appliances considered for disposal. |
|---|---|

Disclaimer

The material contained in this document is provided "as is" and is subject to being changed, without notice, in future editions. Further, to the maximum extent permitted by applicable law, we, Vallen Systeme GmbH, disclaim all warranties, either expressed or implied with regard to this specification and any information contained herein, including but not limited to the implied warranties of merchantability and fitness for a particular purpose. We, Vallen

Systeme GmbH, shall not be liable for errors or for incidental or consequential damages in connection with the furnishing, use, or performance of this document or any information contained herein. We shall not be liable for any direct, indirect, consequential or incidental damage arising out of the use or inability to use of the equipment delivered. We reserve the right to charge for any efforts taken to remedy any problems for which we are not responsible.